

For further information contact: Mike Cowhig at 336-373-2755

Brief Project Description (Please print or type)

~~REPAIR BRICK WALL~~

~~REPAIR BRICK WALL~~

REPAIR STONE WALL

List of contractors who were solicited for proposals (min. of 3 required)

JOE JAMES PIEDMONT STONE, INC

CLAY BURGIN

JOHNSON & JOHNSON MASONRY

Name of contractor selected to perform work and total contract cost

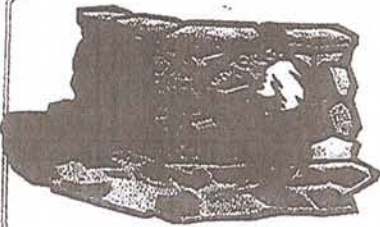
JOE JAMES PIEDMONT STONE, INC

\$ 17,124.01

Additional Attachments Required

1. Attach Certificate of Appropriateness application with details of the project.
2. Provide copies of bids received (minimum of 2 required)

Proposal

Page # 1 of 1 pag

Piedmont Stone, Inc
3005 US 220 Business
Stoneville, NC 27048
Office 336-573-3040
Fax 336-573-3047
www.piedmontstone.com

Proposal Submitted To: <u>Bill Burkley</u>	Job Name <u>110 S Mendenhall St Greensboro</u>	Job # <u></u>
Address <u>E-Mail - [Wburckley1@Tread, r.c.com]</u>	Job Location <u>Greensboro NC</u>	
<u>336-456-2589</u>	Date <u>6-30-16</u>	Date of Plans <u></u>
Phone # <u></u>	Fax # <u></u>	Architect <u></u>

We hereby submit specifications and estimates for:

To Take down granite Wall dig & Pour Footing, Lay 8" Block
& Water Proof, Clean up Stone Rebuild Wall, to Match what
it Look Like Now. Put Drain in with Stone behind Block
Back Fill & Sowing & Straw.

This is a Sum-Sum / Turn Key 17,124.11

We propose hereby to furnish material and labor – complete in accordance with the above specifications for the sum of:

\$ _____ Dollar

with payments to be made as follows: _____

Any alteration or deviation from above specifications involving extra costs will be executed only upon written order, and will become an extra charge over and above the estimate. All agreements contingent upon strikes, accidents, or delays beyond our control.

Respectfully
submitted

Joel E. James

Note – this proposal may be withdrawn by us if not accepted within 90 days

Acceptance of Proposal

The above prices, specifications and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payments will be made as outlined above.

Signature _____

Date of Acceptance _____ Signature _____

JOHNSON & JOHNSON MASONRY

412 Berryman Street
Greensboro, NC 27405
Ph 336-288-8813
Fax 336-288-8814

ESTIMATE

Date	Estimate #
6/27/2016	915

Name / Address
Bill Burckley 110 S. Mendenhall St. Greensboro, NC 336-456-2589

Project
Granite Wall Repair

Description	Total
Johnson & Johnson Masonry will do the following for: 1) Remove the front 54LF of granite wall and clean mortar off of stones 2) Dig and pour a 54 L x 32" W x 8" D footing 3) Install a 54'L x 12" W x 4' high block wall reinforced with grout and rebar 4) Install stone wall adjacent to reinforced block wall 5) Backfill void area behind wall This price includes labor and material.	40,000.00
Thank you for the opportunity to quote on this project.	Total \$40,000.00